# TEKNOFLOR®

HIGH PERFORMANCE FLOORING



CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

#### TRADITIONAL LOOK, MODERN COMPOSITION.

TEKNOFLOR® NATURESCAPES HPD™ is the brand's first organic sheet good made with ecuran, an organically-derived composite material processed from plant based oils such as castor oil and naturally occurring minerals such as chalk. This resilient sheet flooring product has all the advantages of resilient sheet vinyl: durability, easy maintenance and versatility but without the PVC. The product offers twenty-four beautiful designs in three distinct styles that can be used independently or together. Naturescapes HPD brings life to organic flooring with design, color, performance and an environmental focus perfect for any commercial space. Contact your Teknoflor sales representative for more information.







**DURABLE AND EASY** MAINTENANCE

- No Wax, No Buff and no sealers or finishes needed; easily cleaned by damp mopping or auto-scrubbing
- 2.5mm gauge for enhanced performance in heavy traffic areas
- Maintenance savings result in investment payback in approximately two years
- **ENVIRONMENTALLY FRIFNDIY**
- No buff floors mean no bacteria, dust or wax particles are thrown into the air during cleaning
- No odors from floor finishes or strippers; no wax flushed into sewer system
- Complies with REACH requirements for Substances of Very High Concern
- Made with ecuran, a high performance and sustainable composite material of organically-derived polyurethane processed from plant based oils such as castor oil and naturally occurring minerals such as chalk

SAFE

- ADA Compliant
- Approved for emergency egress areas NFPA 101 and NFPA 99

**OVERALL THICKNESS** 

• 2.5mm

WARRANTY

• 12-year commercial warranty / 20-year residential warranty

**APPLICATIONS** 

· Ideal for Healthcare, Senior Living, Retail, Corporate/Office, Academic and **Hospitality Environments** 



### TEKNOFLOR® NATURESCAPES HPD™ • JASPER OAK COLLECTION



89500 Natural Cherry



89502 Sand



89504 Dune



89506 Driftwood



89501 Beach



89503 Sun Bleached



89505 Baywood




89507 Classic Grey


### TEKNOFLOR® NATURESCAPES HPD™ • PHOENIX COLLECTION




89508 Flint

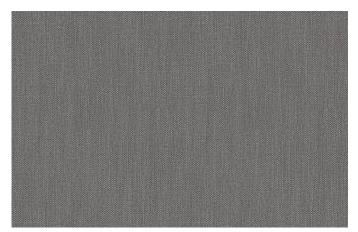


89510 Ivory Black

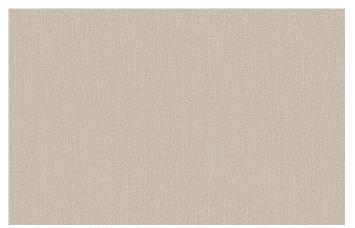


89512 Silt




89514 Forest

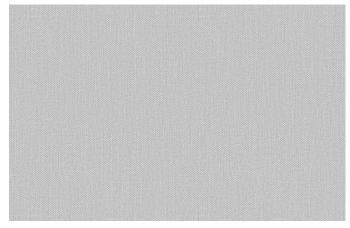


89509 Chalk

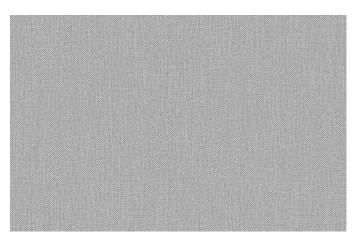

89511 Bentinite

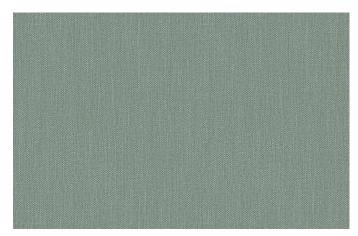

89513 Evergreen

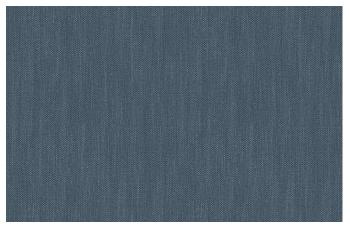

89515 Indigo

#### TEKNOFLOR® NATURESCAPES HPD™ • ISLEY COLLECTION



89516 Sandstone



89518 Titanium



89520 Lead



89522 Graphite



89517 Clay



89519 Ivory



89521 Zinc



89523 Carbon

## TEKNOFLOR® NATURESCAPES HPD™

CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

PRODUCT DATA			
USE	Commercial & Residential	DIMENSIONS	6'7" x 65'7" (2.0M x 20.0M)
COMPOSITION	Polyurethane Sheet Flooring	ROLL SIZE	48.1 sq. yd.
OVERALL THICKNESS	2.5mm (0.098")	ROLLS / PALLET	6
WARRANTY	12-Year Commercial 20-Year Residential	PALLETS / CONTAINER	10

SAFETY & PERFORMANCE	TEST METHOD	STANDARD REQUIREMENT	RESULT
CRITICAL RADIANT FLUX	ASTM E648	Class I: ≥ 0.45 W/sq.cm.	Passes Requirements
SMOKE DENSITY	ASTM E662	Flaming: ≤ 450 Non-Flaming: ≤ 450	Passes Requirements
REACH Substances of Very High Concern	REACH SVHC 174	≤0.1% by Product Weight (per substance)	Passes Requirements
HEAVY METALS	ASTM F963	Refer to Standard	No Concern with Heavy Metal Content
PHTHALATES	ASTM D7823 / CPSC-CH-C1001-09.3	Refer to Consumer Product Safety Improvement Act (CPSIA)	None Detected
ANTIFUNGAL ACTIVITY (No Antimicrobial Agent Added)	ASTM G21	N/A	Face & Back: <10% Growth
COEFFICIENT OF FRICTION (STATIC, DRY)	ASTM D2047	N/A	≥0.6
CASTOR CHAIR	ISO 4918	N/A	25,000 Cycles: 4.5-5.0 AATCC Slight gloss change
Floor Materials & Footwear; Voltage Measurement	ANSI / ESD STM97.2	N/A	Average (Absolute): ≤2.0kV

MANUFACTURING & USAGE	TEST METHOD	STANDARD REQUIREMENT	RESULT
RESIDUAL INDENTATION	ASTM F1914	Maximum: 0.012"	Passes Requirements
STATIC LOAD	ASTM F970	PSI ≥ 75: R (Residential) PSI ≥ 125: LC (Light Commercial) PSI ≥ 175: C (Commercial)	Passes Requirements ≥1,000 PSI
FLEXIBILITY	ASTM F137	No cracks/breaks from 0.25" (6.4mm) Mandrel	Passes Requirements
CHEMICAL RESISTANCE	ASTM F925	No more than "Slight Change"	Passes Requirements
RESISTANCE TO HEAT	ASTM F1514	Average & Max ΔE < 8.0	Passes Requirements
RESISTANCE TO LIGHT	ASTM F1515	Average & Max ΔE < 8.0	Passes Requirements









TEKNOFLOR®

### TEKNOFLOR® NATURESCAPES HPD™

CHLORINE-FREE SHEET • HIGH PERFORMANCE DESIGN

#### TRANSPARENCY & SUSTAINABILITY





Living Product Challenge 1.1 **16**/20 6.91 m<sup>3</sup> EXP. 5/3/2021

**JUST** is a program that provides an innovative platform for organizations to be transparent about operations, including employee benefits and financial and community investments. The program highlights companies that have transparency in social justice and equity policies.

**Declare** is a transparency platform and product database and its label serves as a nutrition label for products.

#### The Living Product Challenge 1.1 Standard

contains seven performance categories, or Petals: Place, Water, Energy, Health and Happiness, Materials, Equity and Beauty. Petals are subdivided into a total of 20 Imperatives, each of which focuses on a specific sphere of influence.

